

General characteristics

e-Charger: Pole
 Colour: Black
 Material: Anti-vandal steel
 Weight: 55 kg
 Display*: 8" - 2.000 lumens
 Mode 3 PWM control according to ISO/IEC 61851-1
 Lector RFID*1 ISO/IEC 14443 A/MIFARE
 MID counter*1
 Electrical protections per socket: type A differential and 40A circuit breaker.
 Operating temperature: from -5° to 45°
 Storage temperature: from -40° to 70°

Electrical characteristics


Conector type: Socket / Type 2
 Grid type: 230V / 400V
 Maximum recharging intensity: 32A (per phase)
 Maximum recharging power: 7,3kW o 22kW (per socket)
 Configurable current: from 6 to 32 Amps
 Nominal frequency: 50Hz / 60Hz
 Protection index: IP54 / IK10
 Residual current detection: AC 30mA / DC 6mA*2

Composition of the product number

Model		POLE
Number of output sockets	1	X1
	2	X2
Intensity	32A	32
Grid type	Single-phase	1
	Three-phase	3
Wallbox		W
Accessories*2:		
Router with 4G connectivity		V2C-4G
Resettable protections (per output)		V2C-REARM-1
Differential single-phase Type B (per output)		V2C-DIFB-M
Differential three-phase Type B (per output)		V2C-DIFB-T
Transient and permanent surges (single-phase)		V2C-ICAYSBTYP-M
Transient and permanent surges (three-phase)		V2C-ICAYSBTYP-T

Dimensions


Floor-standing version

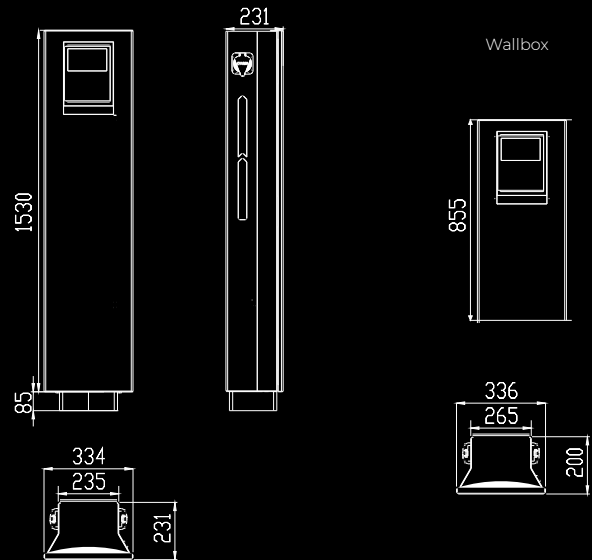

Functional characteristics

User platform: Application y portal V2C Cloud*1
 Connectivity: Ethernet / WiFi / Bluetooth*1
 Communication: OCPP / Rest API Cloud / OTA*1

POLE-X2-32-3-W

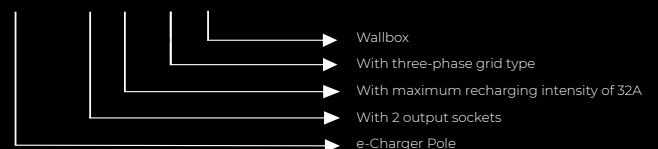

*1 En V2C Cloud models

*2 Optional