

General characteristics

e-Charger: Screen
Colour: Black
Material: Anti-vandal and anti-graffiti steel
Weight: 135 kg
Display: 43" - 2.000 lumens - Contrast 3.000 2:1
Lector RFID ISO/IEC 14443 A/MIFARE
MID counter
Connector locking
Temperature control by fans
Operating temperature: from -25° to 50°
Storage temperature: from -40° to 50°

Electrical characteristics


Connector type: Socket
Grid type: 230V / 400V
Maximum recharging intensity: 32A (per phase)
Maximum recharging power: 7,4kW or 22kW*
Configurable current: from 6 to 32 Amps
Nominal frequency: 50Hz / 60Hz
Protection index: IP54 / IK10
Residual current detection: AC 30mA / DC 6mA*

* Depending on the model

Composition of the product number

Model		SCREEN
Intensity		32
Grid type	Single-phase	1
	Three-phase	3
Optional accessories:		
Router with 4G connectivity		V2C-4G

Dimensions

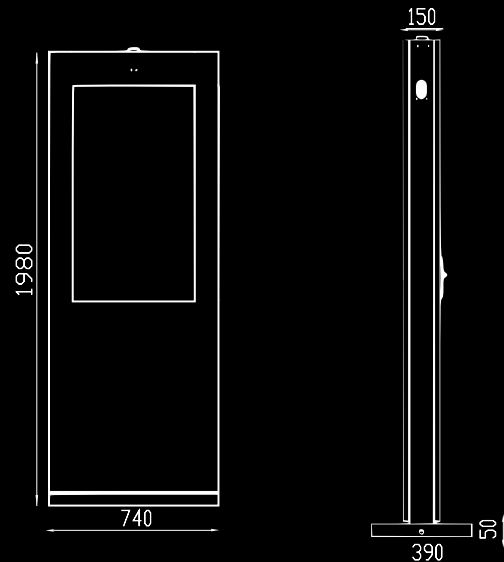

Functional characteristics

User platform: Application and portal V2C Cloud
Connectivity: Ethernet / WiFi / Bluetooth
Communication: OCPP / Rest API Cloud / OTA
Advertising platform

SCREEN32-1

