

General characteristics

e-Charger: Pole Pro

Colour: Black

Material: Anti-vandal steel

Weight: 55 kg

Display with recharge data visualisation*1: 7" - 1.000 lumens

Mode 3 PWM control according to ISO/IEC 61851-1

RFID reader ISO/IEC 14443 A/MIFARE

MID meter differentiated by socket*1

Electrical protections per socket: type A differential and

40A circuit breaker*2

Operating temperature: -25° a 70°

Storage temperature: -40° a 70°

Electrical characteristics

Connector type: Socket Type 2 / Shutter*3

Grid type: 230V / 400V

Maximum recharging power: 7,3kW or 22kW (per socket)

Configurable current: from 6 to 32 Amps

Nominal frequency: 50Hz / 60Hz

Protection index: IP54 / IK10


Composition of the product number

Model		POLEPRO
Number of output sockets	1	X1
	2	X2
Intensity	32A	32
Grid type	Single-phase	1
	Three-phase	3
Wallbox		W

Accessories*4:

Resettable protection (per socket)	V2C-REARM-1
Differential single-phase Type B (per socket)	V2C-DIFB-M
Differential three-phase Type B (per socket)	V2C-DIFB-T
Leak detector (per socket)	V2C-F

Dimensions

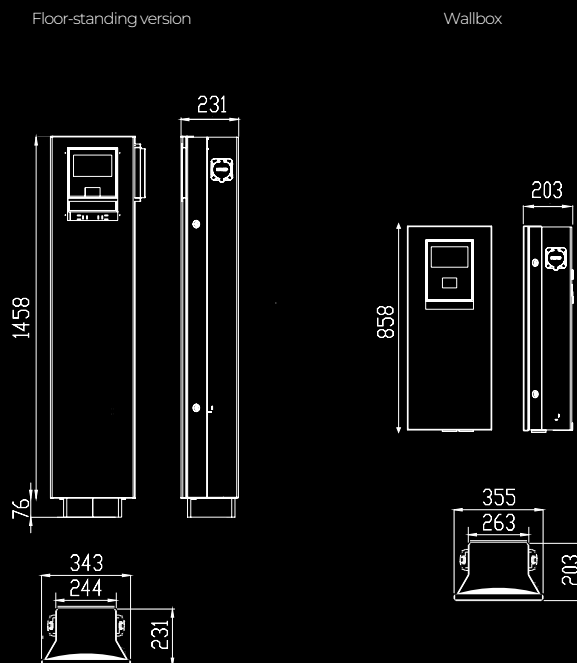


Functional characteristics

User platform: Application y V2C Cloud portal*1

Connectivity: Ethernet / WiFi / Bluetooth / 3G / 4G / 5G*1

Communication: OCPP / Rest API Cloud / OTA*1

POLEPRO-X2-32-3-W

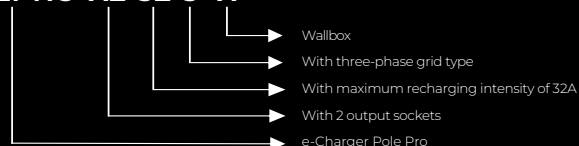

*1 On V2C Cloud models

*2 NF in French market

*3 French market

*4 Optional