

General characteristics

e-Charger: Trydan
 Color: Black
 Material: Polycarbonate MVR
 Maximum weight: 7kg
 Charging Cable length: 5 m / 10 m
 Charging Cable type: Flat / Spring
 Operating temperature: from -25° to 50°
 Storage temperature: from -40° to 70°
 Display*1: 2,6"
 RGB lighting depending on state of charge

Electrical characteristics

Conector type: Type 2 / Socket
 Voltage: 230V / 400V
 Maximum power output: 7,4kW or 22kW*1
 Adjustable current: 6 - 32A (per phase)
 Nominal frequency: 50Hz / 60Hz
 Protection class: IP54 / IK10
 Residual current detection: AC 30mA / DC 6mA*1
 MID meter*2


*1 Depending on the model

*2 Optional

Part number structure

Model			TRY
Intensity			32
Grid type	Single-phase		1
	Three-phase		3
Cable type	Flat	5m	L5
		10m	L10
	Spring		M
	Socket		S
Protections			P
Schuko			SC
Accessories:			
Leak detector			V2C-F
Remote			V2C-R
Cable support			V2C-SOP
Stand			V2C-PED
Single-phase MID meter			V2C-MID-1
Three-phase MID meter			V2C-MID-3

Dimensions

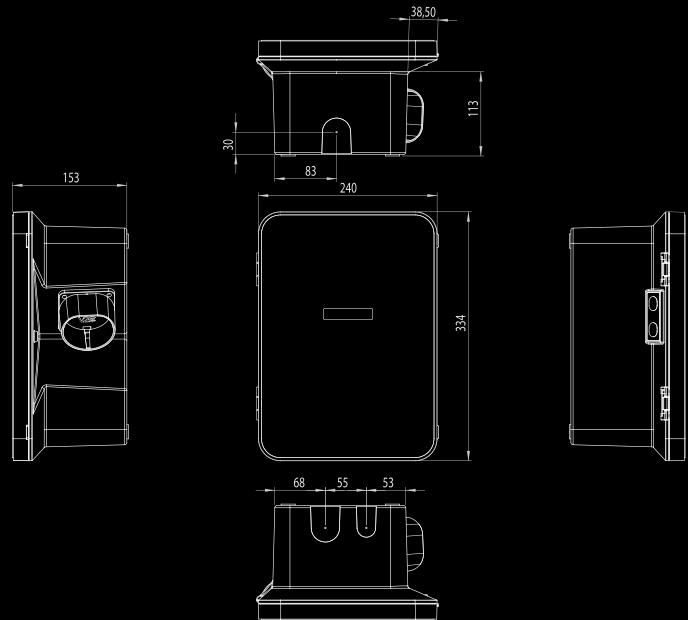

Functional characteristics

User platform: APP & V2C Cloud portal
 Connectivity: WiFi / Bluetooth
 Communication: OCPP / Rest API Cloud
 Configuration with smart devices: Alexa, Google Home

TRY32-1-L5-P-SC

