

### General characteristics

e-Charger: Trydan Pro  
 Color: Black  
 Material: Polycarbonate MVR  
 Maximum weight: 7kg  
 Charging Cable length: 5 m / 10 m  
 Charging Cable type: Flat  
 Operating temperature: from -25° to 50°  
 Storage temperature: from -40° to 70°  
 Display: 2,6"  
 RGB lighting depending on state of charge


### Electrical characteristics

Conector type: Type 2 / Socket  
 Voltage: 230V / 400V  
 Maximum power output: 7,4kW or 22kW  
 Adjustable current: 6 - 32A (per phase)  
 Nominal frequency: 50Hz / 60Hz  
 Protection class: IP54 / IK10  
 Residual current detection: AC 30mA (if it has built-in protections) / DC 6mA\*1  
 MID meter\*1  
 Own meter: class A or equivalent (error ≤2%). Factory verification.  
 \*1 Optional

### Part number structure

Model	TRYPRO		
Intensity	32		
Installation type	Single-phase	1	
	Three-phase	3	
Cable type	Flat	5m	L5
		10m	L10
	Socket	S	
Protections	P		
Schuko	SC		
Accessories:			
Leak detector	V2C-F		
Cable support	V2C-SOP		
Stand	V2C-PED		
Single-phase MID meter	V2C-MID-1		
Three-phase MID meter	V2C-MID-3		

### Dimensions

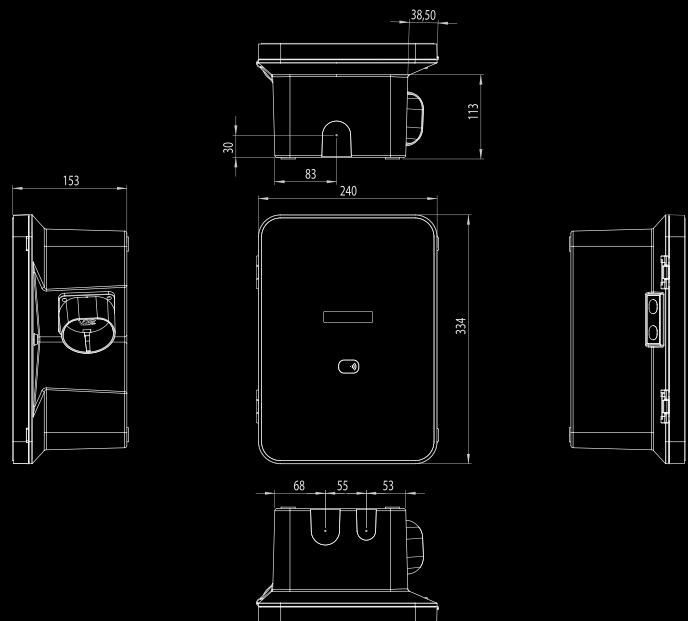

### Functional characteristics

User platform: APP & V2C Cloud portal  
 Connectivity: WiFi / Bluetooth / Ethernet / 4G\*2  
 Communication: OCPP / Rest API Cloud  
 Configuration with smart devices: Alexa, Google Home  
 RFID

\*2 Includes SIM card

### TRYPRO32-1-L5-P-SC

