

General characteristics

e-Charger: Trydan
 Color: Black
 Material: Polycarbonate MVR
 Maximum weight: 7kg
 Charging Cable length: 5 m / 10 m
 Charging Cable type: Flat / Spring
 Operating temperature: from -25° to 50°
 Storage temperature: from -40° to 70°
 Display: 2,6"
 RGB lighting depending on state of charge


Electrical characteristics

Conector type: Type 2 / Socket
 Voltage: 230V / 400V
 Maximum power output: 7,4kW or 22kW
 Adjustable current: 6 - 32A (per phase)
 Nominal frequency: 50Hz / 60Hz
 Protection class: IP54 / IK10
 Residual current detection: AC 30mA (if it has built-in protections) / DC 6mA*1
 MID meter*1
 *1 Optional

Part number structure

Model		TRY	
Intensity		32	
Installation type	Single-phase	1	
	Three-phase	3	
Cable type	Flat	5m	L5
		10m	L10
	Spring		M
	Socket		S
Protections		P	
Schuko		SC	
Accessories:			
Leak detector		V2C-F	
Remote		V2C-R	
Cable support		V2C-SOP	
Stand		V2C-PED	
Single-phase MID meter		V2C-MID-1	
Three-phase MID meter		V2C-MID-3	

Dimensions

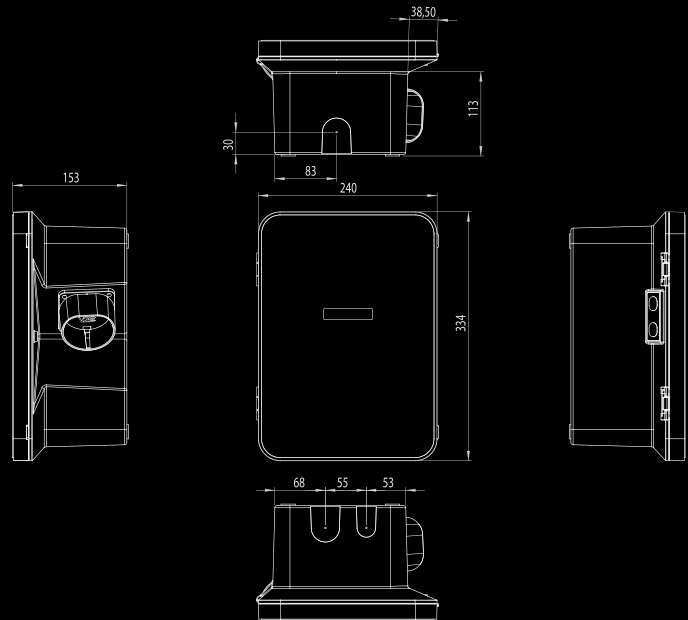

Functional characteristics

User platform: APP & V2C Cloud portal
 Connectivity: WiFi / Bluetooth
 Communication: OCPP / Rest API Cloud
 Configuration with smart devices: Alexa, Google Home

TRY32-1-L5-P-SC

