

# DATA SHEET

## DYNAMIC POWER CONTROL CLAMP

Clamp for installation with dynamic power control of an e-Charger for electric vehicles.

Split core design, easier installation  
Build diode, no high voltage danger

### Specifications

Conversion ratio: 10 A / 0.325 V

Rated voltage: 0.66 kV

Insulation voltage: 2 kV

Rated frequency: 50 Hz or 60 Hz


Operating temperature: -15 °C to 60 °C

Flame resistance: UL94-V0

Certificates: CE, UL, ETL



### Dimensions (mm)

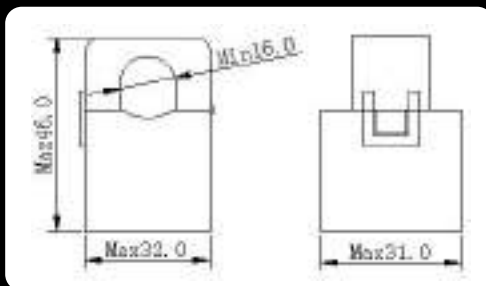

### Parameters

Input (A): 0-120 A

Max current (A): 120 A

Output: 0.333 V / 0-5 V / mA

### Curve performance

